

# CS Series

Sound columns




The CS Series has three sound columns designed for the audio broadcast in churches, train stations and anywhere else where the clarity of the message is essential, even with a large dispersion of audio.

All three models can be mounted in any 100V line installation. Include a power switch for adjusting the output to the requirements of the installation. Made of aluminum, have a high range IP (IP 66) which increases their chances, and it also makes them suitable for outdoor applications.

## Features

- Sound columns with wide audio broadcasting.
- Designed in order that the message is perceived clearly.
- Appropriate for high impedance (100 V line) facilities.
- Especially suitable for churches, train stations and schools.
- High Range IP (IP 66) for outdoor use.

## Dimensions

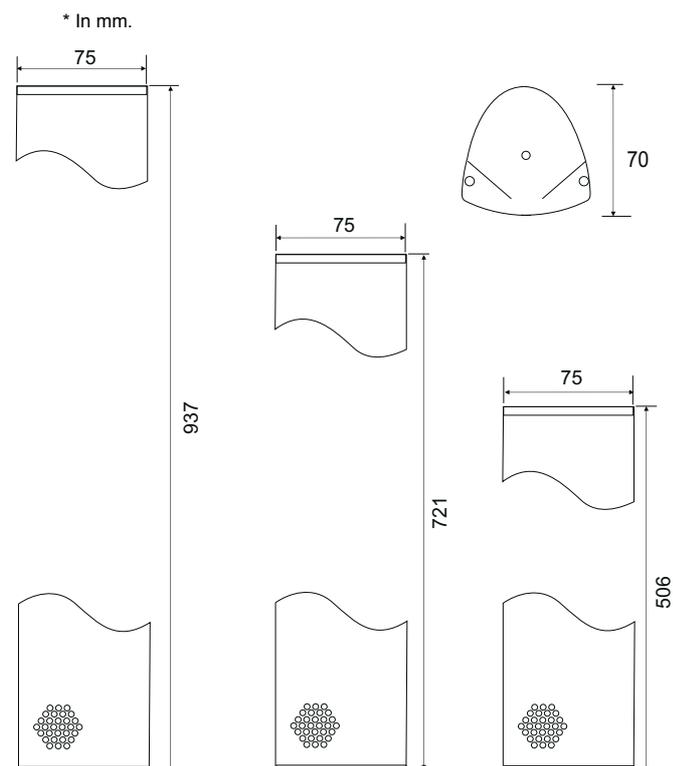

## CS Series

### Rear View



Soportes de fijación (INCLUIDOS)

Soportes de fijación (MONTAJE)

### Specifications

| MODEL                        | CS 206                                  | CS 210                                  | CS 214                                  |
|------------------------------|---|---|---|
| <b>Type:</b>                 | Sound column                            | Sound column                            | Sound column                            |
| <b>LF Elements:</b>          | 6x 2" Woofer                            | 10x 2" Woofer                           | 14x 2" Woofer                           |
| <b>HF Elements:</b>          | 1" Tweeter                              | 1" Tweeter                              | 1" Tweeter                              |
| <b>(*) Power Taps (70V):</b> | 15W (326Ω) / 7,5W (653Ω) / 3,75W (1k3Ω) | 15W (326Ω) / 7,5W (653Ω) / 3,75W (1k3Ω) | 15W (326Ω) / 7,5W (653Ω) / 3,75W (1k3Ω) |
| <b>Power Taps (100V):</b>    | 30W (333Ω) / 15W (666Ω) / 7,5W (1k3Ω)   | 30W (333Ω) / 15W (666Ω) / 7,5W (1k3Ω)   | 30W (333Ω) / 15W (666Ω) / 7,5W (1k3Ω)   |
| <b>Dispersion (H/V):</b>     | 165° / 55°                              | 165° / 50°                              | 165° / 75°                              |
| <b>Freq. response:</b>       | 180 Hz - 18 kHz                         | 180 Hz - 18 kHz                         | 180 Hz - 18 kHz                         |
| <b>Sensitivity:</b>          | 91 dB @ 1W /1m                          | 91 dB @ 1W /1m                          | 91 dB @ 1W /1m                          |
| <b>Max. SPL:</b>             | 105 dB @1W /1m                          | 105 dB @1W /1m                          | 105 dB @1W /1m                          |
| <b>Material (front):</b>     | Aluminium                               | Aluminium                               | Aluminium                               |
| <b>Material (grille):</b>    | Aluminium (powder coated)               | Aluminium (powder coated)               | Aluminium (powder coated)               |
| <b>Color:</b>                | White (RAL9010)                         | White (RAL9010)                         | White (RAL9010)                         |
| <b>IP range:</b>             | IP 66                                   | IP 66                                   | IP 66                                   |
| <b>Dimensions:</b>           | 506 x 75 x 70 mm (L x W x D)            | 721 x 75 x 70 mm (L x W x D)            | 937 x 75 x 70 mm (L x W x D)            |
| <b>Weight:</b>               | 2,2 kg                                  | 3,1 kg                                  | 3,9 kg                                  |

(\*) The power taps indicated are calculated for 100V line. In case of 70V line installations, each power tap will correspond to half the value.

\* Specifications are subject to change without notice.



Rev. 12.08.01