


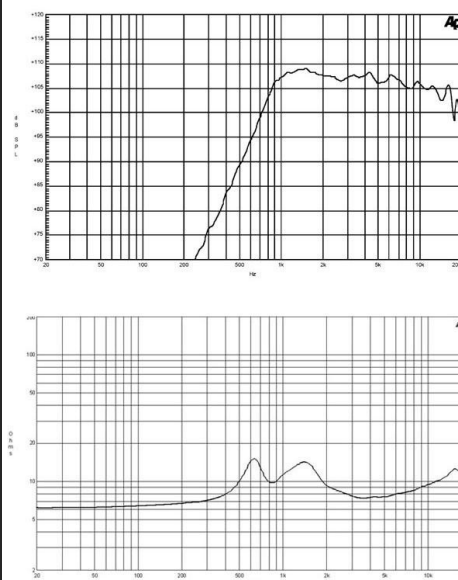

DE200

HF Drivers - 1.0 Inches

100 W continuous program power capacity
1' horn throat diameter
44 mm (1.7 in) aluminium voice coil
Titanium diaphragm
1000 - 18000 Hz response
106 dB sensitivity

Specifications¹

Throat diameter	25 mm (1.0 in)
Nominal impedance	8 Ω
Minimum impedance	7.5 Ω
Nominal power handling ²	50 W
Continuous power handling ³	100 W
Sensitivity (1W/1m) ⁴	106.0 dB
Frequency range	1 - 18 kHz
Recommended crossover ⁵	1.6 kHz
Voice coil diameter	44 mm (1.7 in)
Winding material	Aluminium
Inductance	0.11 mH
Diaphragm material	Titanium
Flux density	1.5 T
Magnet material	Ferrite

Mounting And Shipping Info

Overall diameter	102 mm (4.0 in)
Depth	61 mm (2.4 in)
Net weight	1.7 kg (3.7 lb)
Shipping units	8
Shipping weight	14.6 kg (32.1 lb)
Shipping box	230x230x160 mm (9x9x6.3 in)

Replacement Diaphragm

MMD2008

Mounting And Shipping Info

Two M6 holes 180° on 76 mm (3 in) diameter

Three M6 holes 120° on 57 mm (2.2 in) diameter

1. Driver mounted on B&C ME 45 horn.

2. 2 hour test made with continuous pink noise signal (6 dB crest factor) within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.

3. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

4. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.

5. 12 dB/oct. or higher slope high-pass filter.