



HANDI® 620mm DOUBLE FACE

Analogue clock HANDI®
Double face.
Aluminium case.
Distance of legibility: 60m



Time setting

The professional HANDI® clocks can display the same information, by synchronizing through a master clock or a time server.
On standalone and pulse version, the time setting is manual.

Specification

Power supply	Lithium battery (5 years autonomy) 230VAC 115VAC NTP Version : POE (Power Over Ethernet)*
Certification	CE, EN 60950, EN 55022, EN 55024
IP	20 and 54
MTBF	85 000 hrs
MTTR	20 min
Operating temperature	Without lighting : -20° to +50°C With lighting : -30° to +50°C
Weight	12.8 kg
Dimension	Diameter : 620mm Thickness : 200mm Bracket supports : see schemas below

*Cable length available 2.60m

Storage conditions

Conditions	temperature	hygrometry	Maximum cumulative duration
Extreme	-20°C to 0°C	10 to 85% HR	48h
Extreme	40°C to 70°C	10 to 85% HR	48h
Normales	10°C to 40°C	10 to 85% HR	6 month

The product must be lit for 4 hours every 3 months to keep its characteristics

* see the user manual for more information

Display

Aluminum dial lacquered white.
Arabic numerals screen printed in black.
Black lacquered hands.
Trade mark and logo GORGY TIMING screen printed on the dial.

Key features


- Fast but approximate reading of time.
- Flat aluminium case.
- Acrylic front cover (Polymethyl methacrylate).
- Wall mounting or ceiling mounting with bracket or flag.
- Time setting by synchronization source.
- Can be used outdoor.
- LED lightning.

Remote management (on NTP version)

Configuration and remote setting via a WEB interface. Choice of time zone and automatic summer / winter time change. Supervision via HTTP(S), SNMP, SYSLOG, SSH. "GT Network Manager" (Windows® NT / XP / 2000 / Vista 32-bit / Windows 7 software). Internal log stokeage and SYSLOG export. Compatible with GTNetConfig batch configuration software (CDG027).

Synchronization inputs

- **Standalone quartz time base synchronizable :**
 - AFNOR NFS 87500/IRIG B
 - NTP/SNTP (v2, v3, v4) - Ethernet 10/100 base T
 - Wi-Fi (IEEE 802.11 B/G/N standard).

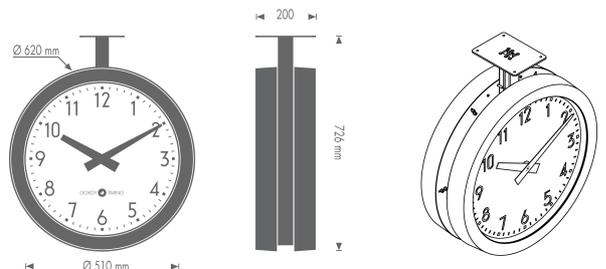

Made in France

Ref : BDR_UK4-8_HANDI-clock-V4.0-priceless

All technical changes, aesthetic, colour can be made without prior notice.

HANDI® 620mm – DOUBLE FACE

		ITEM CODE							
		7	5	2	/				
		↑	↑	↑	↑				
ILLUMINATION									
Without illumination	<input type="checkbox"/>	6							
With illumination	<input type="checkbox"/>	7							
VERSION									
AFNOR NFS 87500 (230VAC power supply) Hours/minutes/seconds	<input type="checkbox"/>	8							
AFNOR NFS 87500 (230VAC power supply) Hours/minutes/seconds	<input type="checkbox"/>	9							
NTP Ethernet 10/100BaseT Synchronization (230VAC power supply) Hours/minutes	<input type="checkbox"/>	N							
NTP Ethernet 10/100BaseT Synchronization (Power Over Ethernet) Hours/minutes	<input type="checkbox"/>	P							
NTP Ethernet 10/100BaseT Synchronization (Power Over Ethernet) Hours/minutes/seconds	<input type="checkbox"/>	Q							
Wi-Fi (IEEE 802.11 B/G/N standard) 230VAC power supply Hours/minutes	<input checked="" type="checkbox"/>	W							
MOUNTING									
Ceiling mount bracket	<input type="checkbox"/>					P			
FRONT FACE									
Waterproof IP54	<input type="checkbox"/>							W	