



## HANDI® 620mm SINGLE FACE

**Analogue clock HANDI®**  
Single face.  
Aluminium case.  
Distance of legibility : 60m



### Time setting

The professional HANDI® clocks can display the same information, by synchronizing through a master clock or a time server.

### Specification

<b>Power supply</b>	Lithium battery (5 years autonomy) 230VAC 115VAC NTP Version : POE (Power Over Ethernet)
<b>Certification</b>	CE, EN 60950, EN 55022, EN 55024
<b>IP</b>	20 and 54
<b>MTBF</b>	85 000 hrs
<b>MTTR</b>	20 min
<b>Operating temperature</b>	Without lighting : -20° to +50°C With lighting : -30° to +50°C
<b>Weight</b>	6.4 kg
<b>Dimension</b>	Diameter : 620mm Thickness : 72mm Bracket supports : see schemas below

\*Cable length available 2.60m

### Storage conditions

Conditions	temperature	hygrometry	Maximum cumulative duration
Extreme	-20°C to 0°C	10 to 85% HR	48h
Extreme	40°C to 70°C	10 to 85% HR	48h
Normales	10°C to 40°C	10 to 85% HR	6 month

*The product must be lit for 4 hours every 3 months to keep its characteristics*

\* see the user manual for more information

### Display

Aluminum dial lacquered white.  
Arabic numerals screen printed in black.  
Black lacquered hands.  
Trade mark and logo GORGY TIMING screen printed on the dial.

### Key features


- Fast but approximate reading of time.
- Flat aluminium case.
- Acrylic front cover (Polymethyl methacrylate).
- Wall mounting or ceiling mounting with bracket or flag.
- Time setting by synchronization source.
- Can be used outdoor.
- LED lightning.

### Remote management (on NTP version)

Configuration and remote setting via a WEB interface. Choice of time zone and automatic summer / winter time change. Supervision via HTTP(S), SNMP, SYSLOG, SSH. "GT Network Manager" (Windows® NT / XP / 2000 / Vista 32-bit / Windows 7 software). Internal log stokage and SYSLOG export. Compatible with GTNetConfig batch configuration software (CDG027).

### Synchronization inputs

- **Standalone quartz time base synchronizable :**
  - AFNOR NFS 87500/IRIG B
  - NTP/SNTP (v2, v3, v4) - Ethernet 10/100 base T
  - Wi-Fi (IEEE 802.11 B/G/N standard).

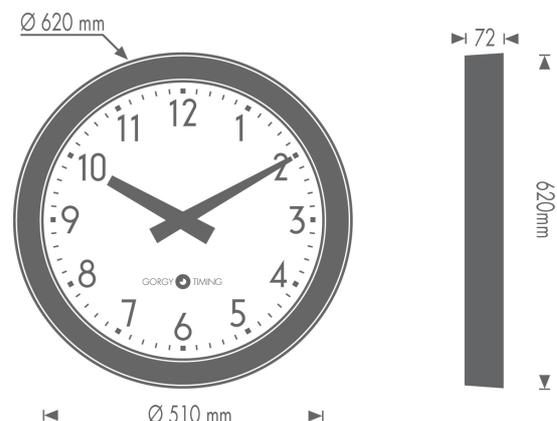

Ref : BDR\_UK4-8\_HANDI-clock-V4.0-priceless

All technical changes, aesthetic, colour can be made without prior notice.

# HANDI® 620mm – SINGLE FACE

		ITEM CODE						
		7	5	0	/			
		↑	↑	↑	↑			
<b>ILLUMINATION</b>								
Without illumination	<input type="checkbox"/>	6						
With illumination	<input type="checkbox"/>	7						
<b>VERSION</b>								
AFNOR NFS 87500 (230VAC power supply Hours/minutes/seconds)	<input type="checkbox"/>		8					
AFNOR NFS 87500 (230VAC power supply) Hours/minutes/seconds	<input type="checkbox"/>		9					
NTP Ethernet 10/100BaseT Synchronization (230VAC power supply) Hours/minutes	<input type="checkbox"/>		N					
NTP Ethernet 10/100BaseT Synchronization (Power Over Ethernet) Hours/minutes	<input type="checkbox"/>		P					
NTP Ethernet 10/100BaseT Synchronization (Power Over Ethernet) Hours/minutes/seconds	<input type="checkbox"/>		Q					
Wi-Fi (IEEE 802.11 B/G/N standard) 230VAC power supply Hours/minutes	<input checked="" type="checkbox"/>		W					
<b>MOUNTING</b>								
Wall mount	<input type="checkbox"/>					1		
Ceiling mount bracket	<input type="checkbox"/>					P		
<b>FRONT FACE</b>								
Waterproof IP54	<input type="checkbox"/>						W	