



## HANDI® 800mm SINGLE FACE

**Analogue clock HANDI®**  
Single face.  
Aluminium case.  
Distance of legibility : 80m



### Time setting

The professional HANDI® clocks can display the same information, by synchronizing through a master clock or a time server.

### Specification

<b>Power supply</b>	230VAC – 115VAC NTP Version : POE (Power Over Ethernet)*
<b>Certification</b>	CE, EN 60950, EN 55022, EN 50024
<b>IP</b>	IP20, 54 / for outdoor option IP65 front / 54 back.
<b>MTBF</b>	85 000 hrs
<b>MTTR</b>	20 min
<b>Operating temperature</b>	Without lighting : -20° to +50°C With lighting : -30° to +50°C On request (extreme environment: ultra high temperature**): Indoor: -20°C to 55°C Outdoor: -20°C to 70°C
<b>Weight</b>	8.6 kg
<b>Dimension</b>	Diameter : 800mm Thickness : 82mm

\*Cable length available 2,60m

\*\*Operation under ultra high temperature accelerates deterioration thus reducing lifespan of the product.

### Storage conditions

Conditions	temperature	hygrometry	Maximum cumulative duration
Extreme	-20°C to 0°C	10 to 85% HR	48h
Extreme	40°C to 70°C	10 to 85% HR	48h
Normales	10°C to 40°C	10 to 85% HR	6 month

The product must be lit for 4 hours every 3 months to keep its characteristics\*.  
\* see the user manual for more information

### Display

Aluminum dial lacquered white.  
Arabic numerals screen printed in black.  
Black lacquered hands.  
Trade mark and logo GORGY TIMING screen printed on the dial.

### Key features


- Fast but approximate reading of time.
- Flat aluminium case.
- Acrylic front cover (Polymethyl methacrylate).
- Wall mounting or ceiling mounting with bracket or flag.
- Time setting by synchronization source.
- Can be used outdoor.
- LED lightning.

### Remote management (on NTP version)

Configuration and remote setting via a WEB interface. Choice of time zone and automatic summer / winter time change. Supervision via HTTP(S), SNMP, SYSLOG, SSH. "GT Network Manager" (Windows® NT / XP / 2000 / Vista 32-bit / Windows 7 software). Internal log storage and SYSLOG export. Compatible with GTNetConfig batch configuration software (CDG027).

### Synchronization inputs

- **Standalone quartz time base synchronizable :**
  - AFNOR NFS 87500/IRIG B
  - NTP/SNTP (v2, v3, v4) - Ethernet 10/100 base T
  - Wi-Fi (IEEE 802.11 B/G/N standard).

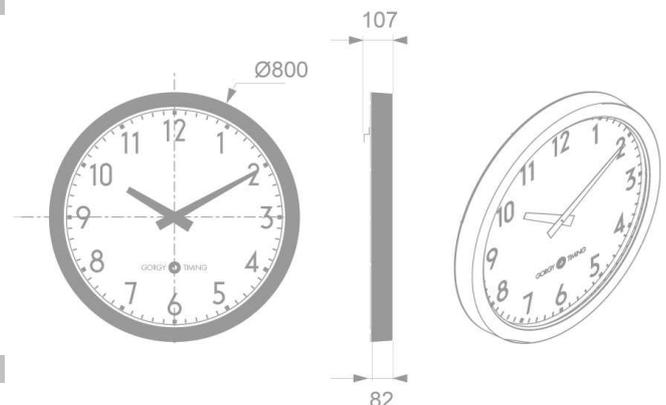

# HANDI® 800mm – SINGLE FACE

		ITEM CODE						
		7	8	0	/			
		↑	↑	↑	↑			
<b>ILLUMINATION</b>								
Without illumination	✘	8						
With illumination	✘	9						
<b>VERSION</b>								
AFNOR NFS 87500 (230VAC power supply) Hours/minutes/seconds	✘		8					
AFNOR NFS 87500 (230VAC power supply) Hours/minutes	✘		9					
NTP Ethernet 10/100BaseT Synchronization (115VAC power supply) Hours/minutes	✘		R					
NTP Ethernet 10/100BaseT Synchronization (230VAC power supply) Hours/minutes	✘		N					
NTP Ethernet 10/100BaseT Synchronization (Power Over Ethernet) Hours/minutes	✘		P					
Wi-Fi (IEEE 802.11 B/G/N standard) 230VAC power supply Hours/minutes	❖		W					
<b>MOUNTING</b>								
Wall mount	✘					1		
Ceiling mount bracket	✘					P		
<b>OPTIONS</b>								
Waterproof Case	✘						W	