

# LEDI® REVERSO 5

## Indoor / Double face



Professional LED clock, robust and stylish combining the best of the technology for an easy installation and operation.



### Time setting

The professional LEDI® clocks can display the same time information, synchronized by a master clock or a time server.

### Points forts


- Perfectly silent**, direct and accurate reading of time.
- SMD LED technology**. Display in Red.
- The patented technology of the light guide** provides a perfect regularity of the brightness and viewing angle at 160°.
- The front face of the LEDI®** is coated with an antiglare and anti-scratch film giving an extraordinary 60000 : 1 level of contrast.
- A protection against over-voltage and industrial interference** via EMC filter.
- An easy "plug and play" installation**.
- A matt finish anodized aluminium case:**
- Double Face IP30.**
- Its participation in the sustainable development**, life span over 20 years.
- 2 years warranty.**

### Specification

<b>Power supply</b>	230VAC/50-60Hz 115VAC/50-60Hz Low voltage 24VDC
<b>Certifications</b>	CE, EN 60950, EN 55022, EN 55024, ROHS
<b>Consumption maximale</b>	6 VA (Single Face) 12 VA (double face)
<b>IP</b>	30
<b>MTBF</b>	56 000 h.
<b>MTTR</b>	Display : 5 min.
<b>Weight</b>	≈ 1.2 – 1.6 kg
<b>Dimensions</b>	235x145 x99 mm (LxHxD) Mounting bracket : 150 mm
<b>Digit height</b>	Hour/minute : 50 mm
<b>Maximal distance of legibility</b>	2 meters
<b>Shock resistance</b>	IK9
<b>Operating temperature</b>	-20° to 50°C
<b>Electrical equipment classification</b>	Classe 2 

### Synchronization inputs

- AFNOR NFS 87500
- IRIG B : shall be specified on purchase order.

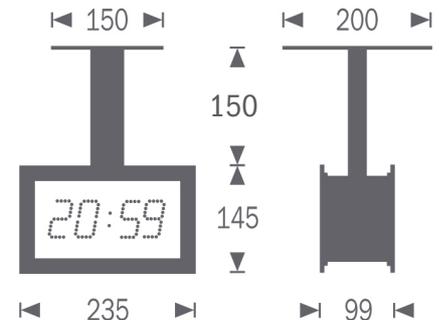

### Display / LED specifications

Simple row LED display.

SMD Technology, Viewing Angle: 160°.

SMD Technology, Viewing Angle: 160°.

Red	245 mcd
-----	---------



# LEDI® REVERSO 5 Indoor / Double face

		ITEM CODE							
		ND350							
VERSION		↑	↑	↑	↑	↑	↑	↑	
AFNOR NFS 87500 / IRIG B receiver clock* <input checked="" type="checkbox"/>		8							
*IRIG.B Version : to be specified as « remark » on your Purchase Order.									
DISPLAY									
Double face <input checked="" type="checkbox"/>		2							
LED									
red <input type="checkbox"/>		1							
Mounting									
To be associated with requested brackets** <input checked="" type="checkbox"/>						P			
** Please refer to the brackets technical sheet									
COLOUR OF CASE									
Standard : anodized aluminium <input type="checkbox"/>						7			
Black anodized aluminium <input checked="" type="checkbox"/>						0			
Specific <input checked="" type="checkbox"/>						-			
POWER SUPPLY									
Standard : 230VAC/50-60Hz <input checked="" type="checkbox"/>						0			
115VAC/50-60Hz <input checked="" type="checkbox"/>						1			
Low voltage power : 24 VDC <input checked="" type="checkbox"/>						4			
OPTIONS									
Tropicalized version <input checked="" type="checkbox"/>							U		