

Intelligent lights – washes

VL2600 Wash

The VL2600 Wash is designed with top-class performance and cost-effective ownership in mind. It produces 22,000 lumens of high color temperature, high contrast light output from its state-of-the-art 550W light engine, with a class-leading zoom range of 12–63°.

The VL2600 Wash includes an internal, beam-shaping framing system and has an adjustable beam edge feature (PC or Fresnel). It also expands on the color range of the VL2500, offering a broader choice of saturated colors whilst maintaining the familiar Vari-Lite color pallet from a CMY color system with variable CTO adjustment, plus a 7-color fixed wheel. Compact, lightweight, fast and accurate, the VL2600 Wash is engineered to be easy to use, prep and maintain.

The VL2600 Wash is one of three luminaires designed as the LED generation update for the popular VL2500 Series. A full system lighting solution with dedicated Spot, Wash and Profile fixtures, the VL2600 range combines Vari-Lite quality and performance with the latest LED technology, all engineered to deliver the best possible package to the mid-sized show lighting segment.

Product data



Feature and benefits

- Lower power consumption – approx. 820W (550W LED engine)
- High output – 22,000 lumens
- High color temperature - 7200 CCT
- Good color rendering:
 - CRI 81
 - TM30 Rf/80 Rg/94
- Wide zoom range – 12° to 63°
- Color mixing – CMY + variable CTO
- Fixed color wheel (7 + open)
- Adjustable beam edge – PC to Fresnel
- Beam-shaping framing system
- Compact design – 465 x 300 x 705mm. Weight 30.2kg
- Fast and accurate movement (FP=3s, FT=2s)

Source	Type	LED
	Wattage	550W
	Source lumens	30,000
	Source CCT	8000
	Source CRI (Ra)	82
Optical performance	Output lumens	22,000
	Output CRI (Ra)	81
	Output CCT	7200
	Lux @ 5m 12°	37137 PC Lens
	Lux @ 5m 55°	9284 PC Lens
	Lux @ 10m 10°	37137 PC Lens
	Lux @ 10m 55°	447 Lens
Beam	Narrow zoom angle	12°
	Widest zoom angle	63°
	Shutter / framing	4 blades +/- 90° rotation
	Beam softening	PC and Fresnel optics
Color	Color mixing type	CMY
	CTO	Variable 7200K to 2700K
	1 x Fixed Color Wheel	7 + Open
Movement	Pan	540°
	Tilt	270°
	P / T speed	3.4s / 2.5s

Product data

Cooling	Fan	Yes
	Fan control	Standard and Studio mode
		Variable level control
Noise levels Base level 30db	1m Full operation - full output db	49 Standard mode
	1m Idle - full output db	49 Standard mode
	Modes	Standard / Studio
Power	Range	100-240/250VAC
	Power In - Thru	In & Thru
	Connector type	Trueone powercon black / yellow
	Max wattage	820W
Data Connections	DMX (RDM)	5 Pin XLR in and Thru
	RJ45 Data point	Yes
Data Protocols	DMX (RDM)	Yes 32 / 29 channels
	ArtNET	Yes
Physicals	Size H x W x D (max)	465 x 300 x 705mm
	Weight	30.2kg
	IP rating	IP20
	Hanging	VL Rails
Approbations	CE, ETL, UL, FCC CSA, RoHS, ISO 9001	
Warranty	Standard Philips Vari-Lite 2 year limited warranty	




Philips Vari-Lite VL2600 Wash

Order Code

Philips Vari-Lite VL2600 Wash fixture
c/w 2x hanging rails and TrueOne powerCON input connector

88-105-7340-00

Dimensional drawing

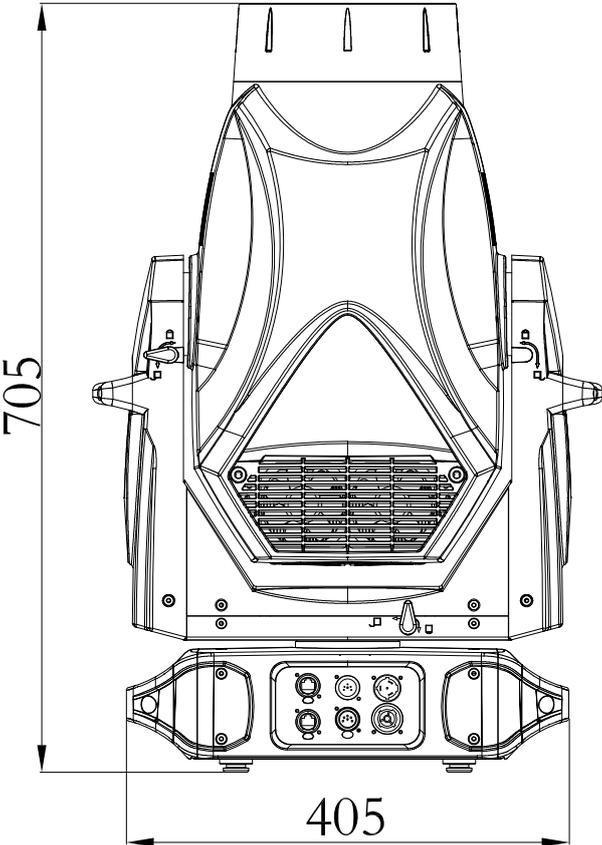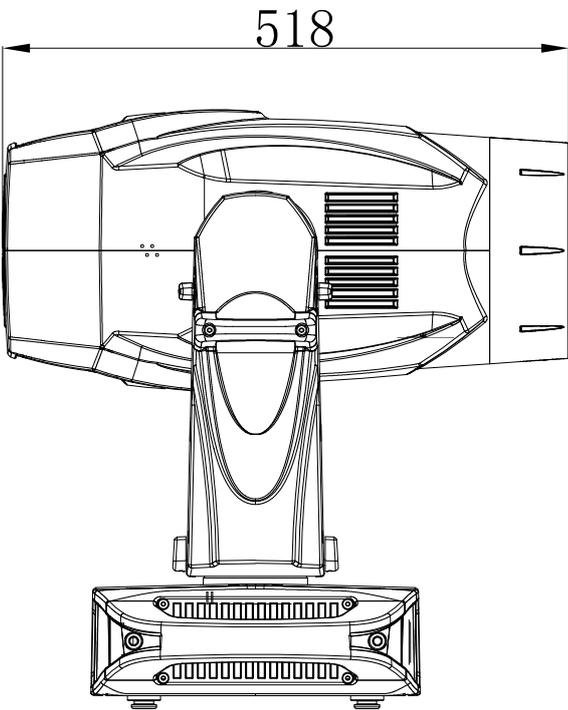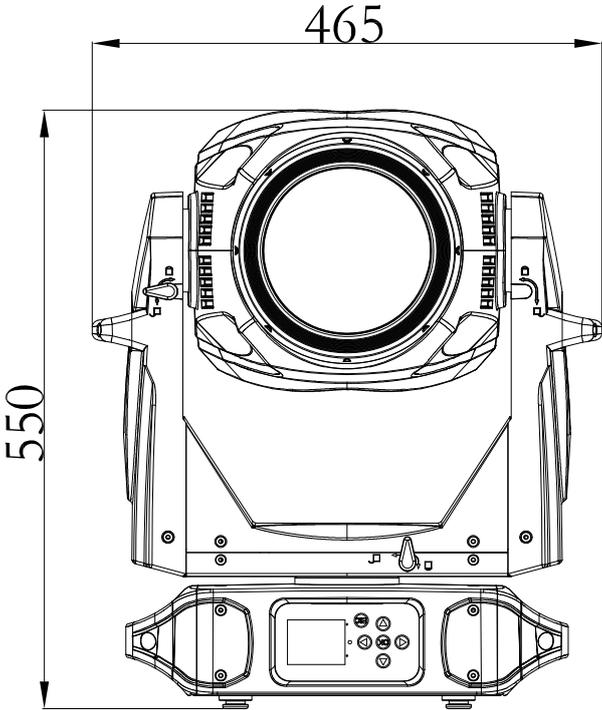



© Philips Lighting Holding B.V. 2017. All rights reserved. Philips reserves the right to make changes in specification and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

02/2018

Data subject to change. All measurements quoted primarily in millimeters.

www.philips.com/vari-lite