



Scan Converter VC-1-SC

Up/Down/Cross Scan Converter to SDI/HDMI with Frame Sync

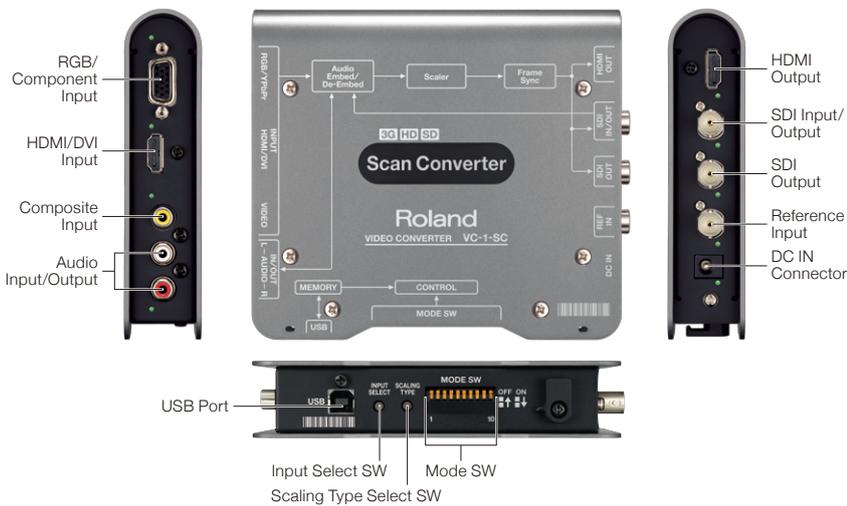

- 3G (Level A and B)/HD/SD SDI In/Out
- HDMI In/Out
- RGB/Component In
- Composite In
- HDCP support
- Built-in Frame Synchronizer and Scaler
- Up/Down/Cross, Frame Rate*, I/P, and Aspect Ratio Conversion
- * Frame skip/repeat type
- Audio embedding or De-embedding
- VC-1 RCS, Dedicated PC/Mac Software App

Block Diagram

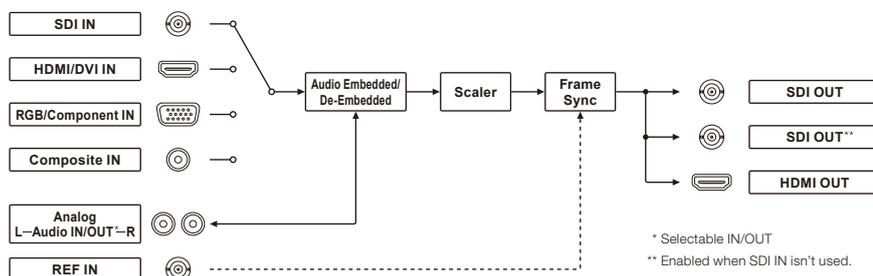

MODE SW

NO	MODE	OFF	ON
10	CONTROL	MODE SW	MEMORY
9	3G-SDI Type	Level A	Level B
8	NTSC Setup	0 IRE	7.5 IRE
7	Output Format	SD	720p 1080i 1080p
6	Output Frame Rate	59.94 Hz	50 Hz
4	AUDIO Embedded/De-Embedded Ch Sel	1 + 2	3 + 4 5 + 6 7 + 8
3	SDI Audio Group	G1/G2	G3/G4
1	Analog AUDIO	IN	OUT

SPECIFICATIONS VC-1-SC

Input Connectors

RGB/Component	Video Format: 1920 x 1080/60p/59.94p/50p/60i/59.94i/50i/24PsF/23.98PsF (Conforms to SMPTE 274M), 1280 x 720/60p/59.94p/50p (Conforms to SMPTE 296M), 720 x 480/59.94p/59.94i, 720 x 576/50p/50i PC Format: 640 x 480/60/72/75/85Hz, 800 x 600/56/60/72/75/85Hz, 1024 x 768/60/70/75/85Hz, 1280 x 768/60/75/85/Hz, 1360 x 768/60Hz, 1152 x 864/75Hz, 1400 x 900/60/75/85Hz, 1280 x 960/60/85Hz, 1280 x 1024/60/75/85Hz, 1400 x 1050/60/75Hz, 1680 x 1050/60Hz, 1600 x 1200/60Hz, 1920 x 1200/60Hz Reduced blanking (Conforms to VESA DMT Version 1.0 Revision 11)
	Video Format: 1920 x 1080/60p/59.94p/50p/30p/29.97p/25p/24p/23.98p/60i/59.94i/50i, 1280 x 720/60p/59.94p/50p/30p/29.97p/25p/24p/23.98p, 720 x 480/59.94p/59.94i, 720 x 576/50p/50i (Conforms to CEA-861-E) PC Format: 640 x 480/60/72/75/85Hz, 800 x 600/56/60/72/75/85Hz, 1024 x 768/60/70/75/85Hz, 1280 x 768/60/75/85/Hz, 1360 x 768/60Hz, 1152 x 864/75Hz, 1400 x 900/60/75/85Hz, 1280 x 960/60/85Hz, 1280 x 1024/60/75/85Hz, 1400 x 1050/60/75Hz, 1680 x 1050/60Hz, 1600 x 1200/60Hz, 1920 x 1200/60Hz Reduced blanking (Conforms to VESA DMT Version 1.0 Revision 11) Color Format: 10 bits YCC 4:2:2, 8 bits YCC 4:4:4, 8 bits RGB 4:4:4 Audio Format: Linear PCM, 24 bits, 48 kHz, 8 ch

HDMI

Video Format: 1920 x 1080/59.94p/50p/59.94i/50i (Conforms to SMPTE 274M), 1280 x 720/59.94p/50p (Conforms to SMPTE 296M), 720 x 480/59.94p/50p/59.94i, 720 x 576/50i (Conforms to ITU-R BT.601-5)
Color Format: 10 bits YCC 4:2:2
Audio Format: Linear PCM, 24 bits, 48 kHz, 16 ch (Conforms to SMPTE 299M, SMPTE 272M-C)

Composite

Video Format: NTSC, PAL

SDI

Video Format: 1920 x 1080/60p/59.94p/50p/30p/29.97p/25p/24p/23.98p/60i/59.94i/50i, 1920 x 1080/30PsF/29.97PsF/25PsF/24PsF/23.98PsF (Conforms to SMPTE 274M), 1280 x 720/60p/59.94p/50p/30p/29.97p/25p/24p/23.98p (Conforms to SMPTE 296M), 720 x 480/59.94i, 720 x 576/50i (Conforms to ITU-R BT.601-5)
Color Format: 10 bits YCC 4:2:2
Audio Format: Linear PCM, 24 bits, 48 kHz, 16 ch (Conforms to SMPTE 299M, SMPTE 272M-C)

Output Connectors

SDI

Video Format: 1920 x 1080/59.94p/50p/59.94i/50i (Conforms to SMPTE 274M), 1280 x 720/59.94p/50p (Conforms to SMPTE 296M), 720 x 480/59.94i, 720 x 576/50i (Conforms to ITU-R BT.601-5)
Color Format: 10 bits YCC 4:2:2
Audio Format: Linear PCM, 24 bits, 48 kHz, 2 ch (Conforms to SMPTE 299M, SMPTE 272M-C)

HDMI

Video Format: 1920 x 1080/59.94p/50p/59.94i/50i, 1280 x 720/59.94p/50p, 720 x 480/59.94i, 720 x 576/50i (Conforms to CEA-861-E)
Audio Format: Linear PCM, 24 bits, 48 kHz, 2 ch

Processing

Resolution Conversion

Selectable Full/Letter Box/Crop/Dot-by-Dot Type

Frame Rate Conversion

Frame Skip/Repeat Type


Audio embedding/de-embedding

2ch


Frame Synchronize

Enabled when reference signal is present.

Dedicated PC/Mac software app. VC-1 RCS

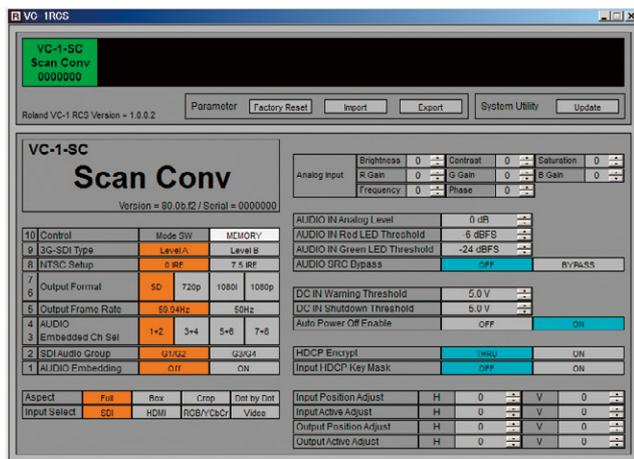

VC-1 series website

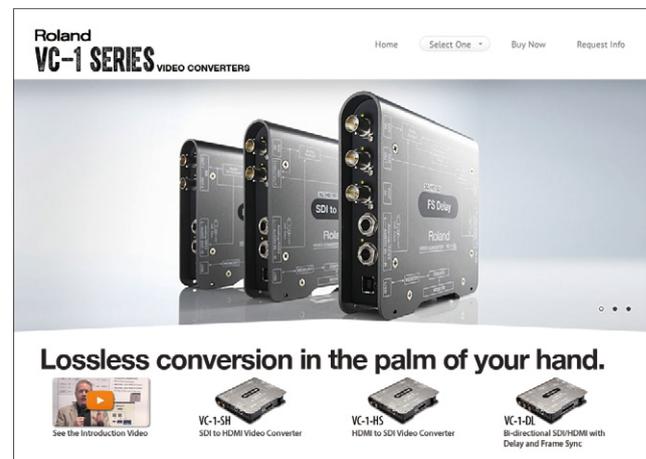

For more information about the Roland VC-1-SC or other VC-1 series Video Converters visit: www.vc1series.com

VC-1 series line-up



VC-1-SH
SDI to HDMI Video Converter



VC-1-HS
HDMI to SDI Video Converter



VC-1-DL
Bi-directional SDI/HDMI with Delay and Frame Sync



www.rolandsystemsgroup.net

All specifications and appearances are subject to change without notice. Company names and product names appearing in this document are registered trademarks or trademarks of their respective owners. Copyright 2013 Roland Corporation. All right reserved.

Printed in Japan. May 2013 RAM-20038 M-PD